

C12-75DG (12V70Ah)



**Gel Electrolyte
NO LOOSE LIQUID**

Century Deep Cycle Gel Batteries are specially designed to provide long lasting, dependable deep cycle power under extreme operating conditions.

The Century Gel Deep Cycle Range incorporates advanced Gel electrolyte technology which holds the battery plates in an immobilized gel. Specialist hard wearing internal components and strong grid designs combine to provide excellent vibration resistance, superior deep cycle performance and repeated deep discharge and recharge capabilities. They are ideal for use in recreational vehicles and accessories, electric powered vehicles, mobility scooters, wheel chairs and marine applications.

Product Specification			
Cells	6	Weight	Approx. 23.5 kg
Voltage	12	Max. Discharge Current	750 A (5 sec)
Capacity	70Ah@20hr-rate to 1.75V per cell @ 25°C	Internal Resistance	Approx. 7.0mΩ
Operating Temperature Range	Discharge: -40°C~60°C Charge: -20°C~50°C Storage: -40°C~60°C	Terminal	M6 Insert
		Container Material	A.B.S. (UL94-HB)
Normal Operating Temperature Range	25°C ± 5°C	Recommended Max. Charging - Current Limit	15A
Float Charging Voltage	13.6 to 13.8 VDC/unit Average at 25°C	Equalisation & Cycle Service	14.2 to 14.4VDC/unit Average at 25°C
Self Discharge	Century GEL batteries can be stored for more than 6 months at 25°C. Self-discharge rate less than 3% per month at 25°C. Please charge batteries before using.	Note: Warranty void if mounted under bonnet.	

Unit: mm Dimension: 260 (L) x 169 (W) x 210 (H) x 235 (TH)



Charging Procedures (12V series)					Discharge Current VS Discharge Voltage			
Application	Charge Voltage (V)			Max. Charge Current	Final Discharge Voltage V/Cell	1.75V	1.70V	1.60V
	Temperature	Set Point	Allowable Range					
Cycle Use	25°C	14.3	14.2~14.4	0.2C	Discharge Current	(A) ≤0.2C	0.2C < (A) < 1.0C	(A) ≥1.0C
Standby	25°C	13.7	13.6~13.8	0.2C				
Charging Method								
Constant Voltage		-0.2Cx2h+2.4~2.45V/Cellx24h, Max. Current 0.3CA						
Charge the batteries at least once a month every six months, if they are stored at 25°C								

Constant Current Discharge Characteristics: A (25°C)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	236.5	169.5	123.3	77.42	43.76	24.98	17.57	14.54	12.25	8.45	7.15	3.78
10.0V	230.2	161.3	120.8	76.14	43.56	24.79	17.50	14.47	12.17	8.38	7.08	3.71
10.2V	216.9	155.6	118.9	75.47	43.15	24.60	17.37	14.41	12.10	8.31	7.01	3.64
10.5V	194.8	143.6	113.2	73.58	42.75	24.42	17.30	14.27	11.96	8.25	6.94	3.57
10.8V	175.8	130.9	104.4	70.35	41.74	23.98	16.83	13.94	11.74	8.11	6.87	3.50
11.1V	153.1	117.0	93.6	65.91	39.65	22.91	16.09	13.26	11.24	7.76	6.67	3.30

Constant Power Discharge Characteristics: W (25°C)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.6V	2464.8	1802.4	1327.1	873.7	500.5	287.4	202.8	168.0	141.8	98.07	80.36	42.44
10.0V	2414.5	1721.5	1299.5	862.8	498.0	286.2	202.4	167.6	140.9	97.66	79.53	42.03
10.2V	2279.2	1664.2	1281.9	852.7	494.4	283.6	201.2	166.8	140.5	96.84	79.12	41.62
10.5V	2052.4	1537.7	1222.3	833.3	489.6	281.0	199.9	165.6	139.2	96.01	78.29	41.21
10.8V	1846.1	1396.2	1123.0	795.3	477.4	276.9	195.1	161.2	137.0	93.95	77.47	40.80
11.1V	1593.6	1239.9	1002.8	745.2	452.4	264.1	185.4	153.5	130.1	90.66	75.00	39.15

All mentioned values are average values.


Life characteristics of cyclic use

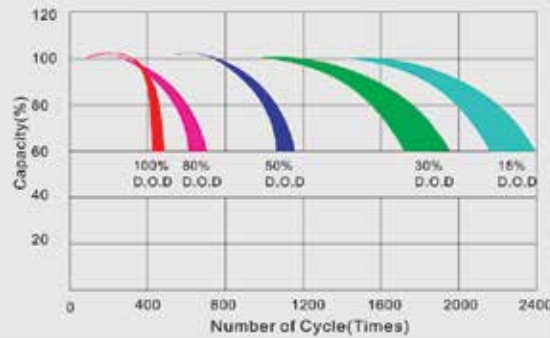


Storage characteristic

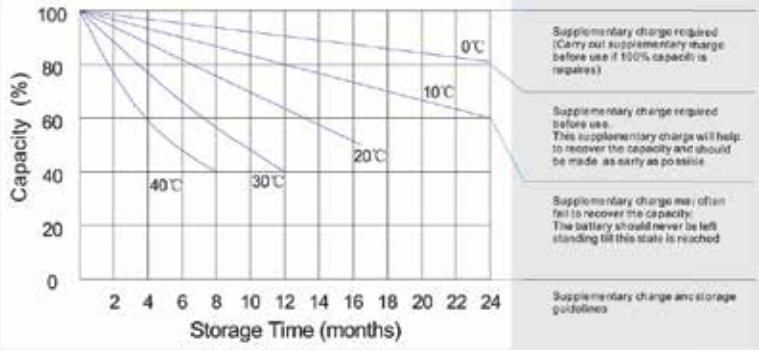

Charge characteristic curve for cyclic use

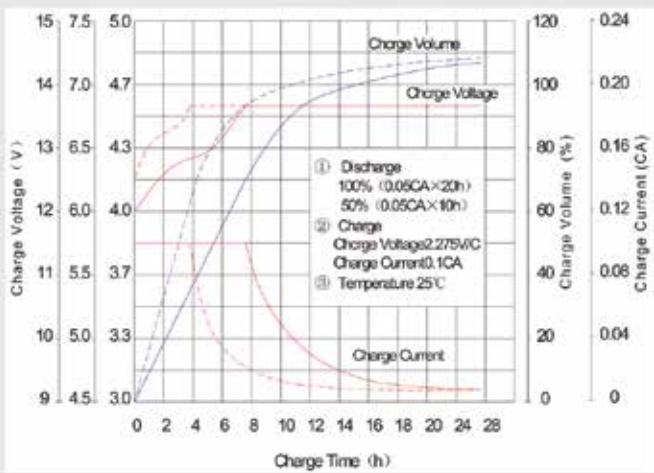

Discharge characteristic Curve

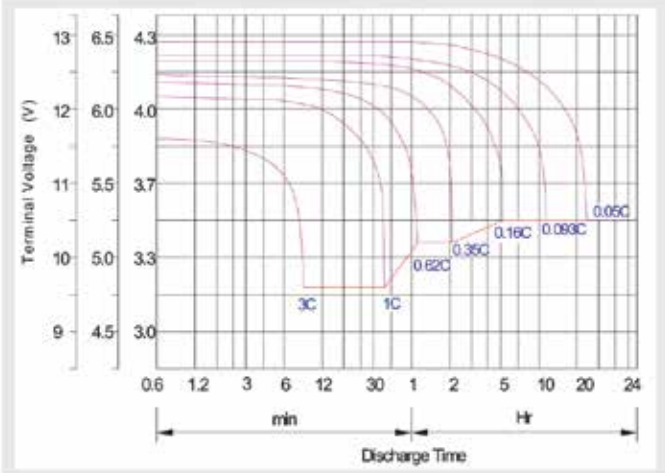

Battery Disposal

This battery is 98% recyclable. Help create a cleaner planet, return your used battery to the original place of purchase or your nearest CenturyYuasa approved Battery Recycling Centre.



Batteries that last and last

For more information visit centurybatteries.com.au or call 13 22 87

ALSO AVAILABLE IN 40 AMP HOUR

See separate spec sheets